

Salim Ziani
Mohammed Chadli
Sofiane Bououden
Ivan Zelinka *Editors*

Proceedings of the 5th International Conference on Electrical Engineering and Control Applications–Volume 1

ICEECA 2022, 15–17 November,
Khenchela, Algeria

Lecture Notes in Electrical Engineering

Volume 1147

Series Editors

Leopoldo Angrisani, Department of Electrical and Information Technologies Engineering, University of Napoli Federico II, Napoli, Italy

Marco Arteaga, Departamento de Control y Robótica, Universidad Nacional Autónoma de México, Coyoacán, Mexico

Samarjit Chakraborty, Fakultät für Elektrotechnik und Informationstechnik, TU München, München, Germany

Shanben Chen, School of Materials Science and Engineering, Shanghai Jiao Tong University, Shanghai, China

Tan Kay Chen, Department of Electrical and Computer Engineering, National University of Singapore, Singapore, Singapore

Rüdiger Dillmann, University of Karlsruhe (TH) IAIM, Karlsruhe, Germany

Haibin Duan, Beijing University of Aeronautics and Astronautics, Beijing, China

Gianluigi Ferrari, Dipartimento di Ingegneria dell'Informazione, Sede Scientifica Università degli Studi di Parma, Parma, Italy

Manuel Ferre, Centre for Automation and Robotics CAR (UPM-CSIC), Universidad Politécnica de Madrid, Madrid, Spain

Sandra Hirche, Department of Electrical Engineering and Information Science, Technische Universität München, München, Germany

Faryar Jabbari, Department of Mechanical and Aerospace Engineering, University of California, Irvine, USA

Limin Jia, State Key Laboratory of Rail Traffic Control and Safety, Beijing Jiaotong University, Beijing, China

Janusz Kacprzyk, Intelligent Systems Laboratory, Systems Research Institute, Polish Academy of Sciences, Warsaw, Poland

Alaa Khamis, Department of Mechatronics Engineering, German University in Egypt El Tagamoa El Khames, New Cairo City, Egypt

Torsten Kroeger, Intrinsic Innovation, Mountain View, USA

Yong Li, College of Electrical and Information Engineering, Hunan University, Changsha, China

Qilian Liang, Department of Electrical Engineering, University of Texas at Arlington, Arlington, USA

Ferran Martín, Departament d'Enginyeria Electrònica, Universitat Autònoma de Barcelona, Bellaterra, Spain

Tan Cher Ming, College of Engineering, Nanyang Technological University, Singapore, Singapore

Wolfgang Minker, Institute of Information Technology, University of Ulm, Ulm, Germany

Pradeep Misra, Department of Electrical Engineering, Wright State University, Dayton, USA

Subhas Mukhopadhyay, School of Engineering, Macquarie University, Sydney, NSW, Australia

Cun-Zheng Ning, Department of Electrical Engineering, Arizona State University, Tempe, AZ, USA

Toyoaki Nishida, Department of Intelligence Science and Technology, Kyoto University, Kyoto, Japan

Luca Oneto, Department of Informatics, Bioengineering, Robotics and Systems Engineering, University of Genova, Genova, Italy

Bijaya Ketan Panigrahi, Department of Electrical Engineering, Indian Institute of Technology Delhi, New Delhi, India

Federica Pascucci, Departamento di Ingegneria, Università degli Studi Roma Tre, Roma, Italy

Yong Qin, State Key Laboratory of Rail Traffic Control and Safety, Beijing Jiaotong University, Beijing, China

Gan Woon Seng, School of Electrical and Electronic Engineering, Nanyang Technological University, Singapore, Singapore

Joachim Speidel, Institute of Telecommunications, University of Stuttgart, Stuttgart, Germany

Germano Veiga, FEUP Campus, INESC Porto, Porto, Portugal

Haitao Wu, Academy of Opto-electronics, Chinese Academy of Sciences, Haidian District Beijing, China

Walter Zamboni, Department of Computer Engineering, Electrical Engineering and Applied Mathematics, DIEM—Università degli studi di Salerno, Fisciano, Italy

Kay Chen Tan, Department of Computing, Hong Kong Polytechnic University, Kowloon Tong, Hong Kong

The book series *Lecture Notes in Electrical Engineering* (LNEE) publishes the latest developments in Electrical Engineering—quickly, informally and in high quality. While original research reported in proceedings and monographs has traditionally formed the core of LNEE, we also encourage authors to submit books devoted to supporting student education and professional training in the various fields and applications areas of electrical engineering. The series cover classical and emerging topics concerning:

- Communication Engineering, Information Theory and Networks
- Electronics Engineering and Microelectronics
- Signal, Image and Speech Processing
- Wireless and Mobile Communication
- Circuits and Systems
- Energy Systems, Power Electronics and Electrical Machines
- Electro-optical Engineering
- Instrumentation Engineering
- Avionics Engineering
- Control Systems
- Internet-of-Things and Cybersecurity
- Biomedical Devices, MEMS and NEMS

For general information about this book series, comments or suggestions, please contact leontina.dicecco@springer.com.

To submit a proposal or request further information, please contact the Publishing Editor in your country:

China

Jasmine Dou, Editor (jasmine.dou@springer.com)

India, Japan, Rest of Asia

Swati Meherishi, Editorial Director (Swati.Meherishi@springer.com)

Southeast Asia, Australia, New Zealand

Ramesh Nath Premnath, Editor (ramesh.premnath@springernature.com)

USA, Canada

Michael Luby, Senior Editor (michael.luby@springer.com)

All other Countries

Leontina Di Cecco, Senior Editor (leontina.dicecco@springer.com)

**** This series is indexed by EI Compendex and Scopus databases. ****

Salim Ziani · Mohammed Chadli ·
Sofiane Bououden · Ivan Zelinka
Editors

Proceedings of the 5th
International Conference
on Electrical Engineering
and Control
Applications–Volume 1

ICEECA 2022, 15–17 November, Khencela,
Algeria



Springer

Editors

Salim Ziani
Department of Electronics
University of Frères Mentouri Constantine 1
Constantine, Algeria

Sofiane Bououden
Faculty of Sciences and Technology
University Abbes Laghrour Khenchela
Khenchela, Algeria

Mohammed Chadli
IBISC Lab, UEVE
University of Paris-Saclay
Evry, France

Ivan Zelinka
Faculty of Electrical Engineering
and Computer Science
VŠB TU Ostrava
Ostrava, Czech Republic

ISSN 1876-1100

ISSN 1876-1119 (electronic)

Lecture Notes in Electrical Engineering

ISBN 978-981-97-0044-8

ISBN 978-981-97-0045-5 (eBook)

<https://doi.org/10.1007/978-981-97-0045-5>

© The Editor(s) (if applicable) and The Author(s), under exclusive license to Springer Nature
Singapore Pte Ltd. 2024

This work is subject to copyright. All rights are solely and exclusively licensed by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

The publisher, the authors and the editors are safe to assume that the advice and information in this book are believed to be true and accurate at the date of publication. Neither the publisher nor the authors or the editors give a warranty, expressed or implied, with respect to the material contained herein or for any errors or omissions that may have been made. The publisher remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

This Springer imprint is published by the registered company Springer Nature Singapore Pte Ltd.
The registered company address is: 152 Beach Road, #21-01/04 Gateway East, Singapore 189721,

If disposing of this product, please recycle the paper.

Organization

Conference

The International Conference on Electrical Engineering and Control Applications (ICEECA) provides a forum for specialists and practitioners to present and discuss their research results in the several areas of the conference, and also state-of-the-art findings in using the applied electrical engineering and automatic control to solve national problems that face developing countries. The conference ICEECA publishes papers on theoretical analysis, experimental studies, and applications in the domain of automatic control and computer engineering. The objective of the conference is not only the exchange of knowledge and experience, since the conference is an open door to students, but also provides opportunities for researchers to target future collaboration on current issues.

Honorary Chair

Abdelouahad Chala, Abbes Laghrour University, Khenchela, Algeria

General Chairs

Sofiane Bououden, Abbes Laghrour University, Khenchela, Algeria
Mohammed Chadli, University of Paris-Saclay, France

Program Chairs

Salim Ziani, University of Frères Mentouri Constantine 1, Algeria
Hamid Reza Karimi, Polytechnic of Milan, Italy
Ivan Zelinka, Technical University of Ostrava, Czech Republic

Steering Committee

Sofiane Bououden, Abbes Laghrour University, Khencela, Algeria
Mohammed Chadli, University of Paris-Saclay, France
Salim Ziani, University of Frères Mentouri Constantine 1, Algeria
Hamid Reza Karimi, Polytechnic of Milan, Italy
Peng Shi, Victoria University, Australia

Local Committee

ICEECA established a Local Committee from the Department of Industrial Engineering as organizer, Faculty of sciences and technology, Abbes Laghrour University, Khencela, Algeria. The list below comprises the Local Committee members.

Abdelaziz Abboudi (Chair), Abbes Laghrour University, Khencela, Algeria
Salim Ziani, University of Frères Mentouri Constantine 1, Algeria
Abderrahim Lanani, Abbes Laghrour University, Khencela, Algeria
Abdelhalim Allaoui, Abbes Laghrour University, Khencela, Algeria
Abdelhakim Sahour, Abbes Laghrour University, Khencela, Algeria
Farouk Boumahrez, Abbes Laghrour University, Khencela, Algeria
Ali Mallem, Abbes Laghrour University, Khencela, Algeria
Mourad Hassad, Abbes Laghrour University, Khencela, Algeria
Abdelkrim Menadi, Abbes Laghrour University, Khencela, Algeria

International Advisory Committee

Belgacem Haba, Xperi Corporation, USA
Abedelfetah Charef, University of Frères Mentouri Constantine 1, Algeria
Abdelhamid Tayebi, Lakehead University, Canada
Hamid Reza Karimi, Polytechnic of Milan, Italy
Ivan Zelinka, Technical University of Ostrava, Czech Republic
L. X. Zhang, Zhejiang University, China
N. B. Braiek, L'Ecole Polytechnique de Tunisie, Tunisia

Scientific Program Committee

ICEECA established an international committee of selected well-known experts in electrical engineering who are willing to be mentioned in the program and to review a set of papers each year. The list below comprises the Scientific Program Committee members.

Abdelaziz Hamzaoui, University of Reims, France
Abdelhafid Zeroual, University of Skikda, Algeria
Abdellah Kouzou, University of Djelfa, Algeria
Abedlhamid Tayebi, Lakehead University, Canada
Abdelghani Chelihi, University of Frères Mentouri Constantine 1, Algeria
Abdesslem Djerdir, University of Belfort-Montbéliard Technology, France
Adam Belloum, University of Amsterdam, Holland
Ahmed-Ali Tarek, University of Caen Normandy, France
Ahmed Bouraiou, Renewable Energy Research Unit in Saharan Region Adrar (URERMS), Algeria
Ahmed Chemori, University Montpellier 2, France
Ahmed Hafaifa, University of Djelfa, Algeria
Ahmed Rachid, University of Picardie Amiens, France
Ahmed Belhani, University of Frères Mentouri Constantine 1, Algeria
Aida Mohamed Salah, Department of Physics, Faculty of Sciences King Abdulaziz University Djeddah, KSA
Ali Zemouche, Université de Lorraine, Nancy, France
Amar Djouak, Université Catholique de Lille, France
Ammar Moussi, University of Biskra, Algeria
Ameur Ikhlef, University of Frères Mentouri Constantine 1, Algeria
Aris Skandar, University of Frères Mentouri Constantine 1, Algeria
Aziz Naamane, Université de Marseille Nord, France
Barkat Ouarda, University of Frères Mentouri Constantine 1, Algeria
Belgacem Haba, Xperi Corporation, USA
Bhekisipho Twala, University of Johannesburg, South Africa
Bin Haji Hassan Masjuki, University of Malaya, Malaysia
Boubekeur Boukhazzar, University of Frères Mentouri Constantine 1, Algeria
Carlos Astorga Zaragoza, CENIDET, Mexico
Chaguetemi Samiha, University of Skikda, Algeria
Cheikh Kheirddine, University of Frères Mentouri Constantine 1, Algeria
Chérif Chibane, MIT, Lincoln Laboratory, Boston, USA
De Lima Neto Fernando, University of Pernambuco, Recife, Brazil
Drai Redouane, Centre de Recherche en Technologies Industrielles CRTI, Algeria
Faouzi Bouani, Ecole Nationale d'Ingénieurs de Tunis, Tunisie
Farid Marir, University of Frères Mentouri Constantine 1, Algeria
Farouk Boumehrez, University of Khenchela
Faycal Megri, Université of Oum El Bouaghi
Fernando Tadeo, University of Valladolid, Spain

Fethi Demim, USTHB Bab Ezzouar, Algiers, Algeria
Fouad Allouani, University of Khenchela, Algeria
Foued Kerrour, University of Frères Mentouri Constantine1, Algeria
Francisco-Ronay Lopez-Estrada, National Technological Institute of Mexico, IT Tuxtla Gutierrez, Mexico
Gloria Osorio Gordillo, CENIDET, Mexico
Hamid Reza Karimi, Ecole Polytechnique de Milan, Italy
Hanane Djellab, University of Tébessa, Algeria
Hervé Coppier, ESIEE, France
Houssem Mahmoud Jerbi, Hail University, KAS
Ilyes Boulkaibet, American University of Middle East, Kuwait
Ivan Zelinka, Technical University of Ostrava, Czech Republic
J. A. T Machado, Institute of Engineering of Coimbra, Portugal
Jean-Jacques Loiseau, IRCyN, France
Kamel Guesmi, University of Djelfa, Algeria
Kheireddine Lamamra, University of Oum Bouaghi, Algeria
Kouider Nacer M'sirdi, University of Marseille Nord, France
Lamir Saidi, University of Batna, Algeria
Lynda Saci, University of Frères Mentouri Constantine 1, Algeria
Maamer Bettayeb, University of Sharjah, UAE
Malika Kandouci, University of Sidi Bel-Abbes, Algeria
Manuel Adam Medina, CENIDET, Mexico
Marouane Alma, Centre de Recherche en Automatique de Nancy, France
Mehadji Abri, University of Tlemcen, Algeria
Mohamed Boumehraz, University of Biskra, Algeria
Mohamed Boutayeb, Centre de Recherche en Automatique de Nancy, France
Mohamed Chemachema, University of Frères Mentouri Constantine 1, Algeria
Mohamed Darouach, University of Lorraine, France
Mohamed Djemai, University of Polytechnic Hauts-de-France, France
Mohamed Elleuch, University of Tunis, Tunisia
Mohamed Lashab, University of Oum El Bouaghi, Algeria
Mohamed Seghir Boucherit, Ecole Nationale Polytechnique, Algeria
Mohammed Msaad, University of Caen Normandie, France
Mounira Ouarzeddine, USTHB, Télécommunication Department, Algiers, Algeria
Nacim Ramdani, University of Orleans, France
Nadjet Zioui, Université du Québec à Trois-Rivières, QC CANADA
Najib Essounbouli, University of Reims Champagne Ardenne, CReSTIC, France
Noureddine Slimane, University of Batna 2, Algeria
Obaid S. Alshammari, Hail University KAS
Ouassila Bourbia, University of Frères Mentouri Constantine 1, Algeria
Peng Shi, Victoria University, Australia
Pierre Borne, Ecole Centrale de Lille, France
Raymond Ghandour, College of Engineering and Technology, AUM, Kuwait
Roman Senkerik, Tomas Bata University in Zlin, Czech Republic
Sahour Abdelhakim, University of Khenchela, Algeria

Said Benierbeh, University of Frères Mentouri Constantine 1, Algeria
Said Hassaine, University of Tiaret, Algeria
Said Mammar, University Paris-Saclay, University of Evry, France
Said Touati, Nuclear Research Center of Birine, DJELFA, Algeria
Samir Mouhadjer, CDER Renewable Energy Development Center, Adrar, Algeria
Svetlana Berjozkina, College of Engineering and Technology, AUM, Kuwait
Tarik Hacib, University of Jijel, Algeria
Tarek Ahmed Ali, University of Caen, France
Xiao-Zhi Gao, School of Computing, University of Eastern Finland, Kuopio, Finland
Youcef Soufi, University of Tebessa, Algeria
Zaher Al-Barakeh, College of Engineering and Technology, AUM, Kuwait
Zoubeida Messali, University of Bordj Bou Arreridj, Algeria

Preface

This proceedings book about the Advanced Control Engineering Methods in Electrical Engineering Systems conference contains accepted papers presenting the most interesting state of the art on this field of research. Presented topics are focused on classical as well as modern methods for modeling, control, identification, and simulation of complex systems with applications in science and engineering. Topics are (but not limited to): control and systems engineering, renewable energy, fault diagnosis-fault tolerant control, large-scale systems, fractional-order systems, unconventional algorithms in control engineering, signal and communications, and much more. The control of complex systems dynamics, analysis, and modeling of its behavior and structure is a vitally important problem in engineering, economy, and generally in science today. Examples of such systems can be seen in the world around us and are a part of our everyday life. Application of modern methods for control, electronics, signal processing, and more can be found in our mobile phones, car engines, home devices as for example washing machine is as well as in such advanced devices as space probes and communication with them. The main aim of the conference is to create periodical possibility for students, academics, and researchers to exchange their ideas and novel methods. This conference will establish a forum for the presentation and discussion of recent trends in the area of applications of various modern as well as classical methods for researchers, students, and academics. The accepted selection of papers was extremely rigorously reviewed in order to maintain the high quality of the conference that is supported by organizing universities and related research grants. Regular as well as student's papers have been submitted to the conference, and in accordance with review process, has been accepted after a positive review. We would like to thank the members of the Program Committees and reviewers for their hard work. We believe that this conference represents a high-standard conference in the domain of control, modeling, and analysis of dynamical and electronic systems. We would like to thank all the contributing authors, as well as the members of the Program Committees and the Local Organizing Committee for their hard and highly valuable work. Their work has definitely contributed to the success of the conference.

This event is supported by the Abbes Laghrour University, Khenchela, Algeria and mainly financed by SONATRACH Society, SONELGAZ Society, DGRSDT (Direction Générale de la Recherche Scientifique et de Développement technologique) and ATRST (L'Agence Thématique de Recherche en Sciences et Technologie).

Constantine, Algeria
Evry, France
Khenchela, Algeria
Ostrava, Czech Republic

Salim Ziani
Mohammed Chadli
Sofiane Bououden
Ivan Zelinka

Contents

Control and Systems Engineering (CSE)

Consensus Approach Based Cooperative Guidance of a Multi-quadrotors System	3
Ahmed Allam, Elhaouari Kobzili, Ouissam Boudiba, Hamza Bouzerzour, Abdelkrim Nemra, and Mohamed Tadjine	
ACO Based Optimal Integral Sliding Mode Controller Design for a New Reconfigurable Unmanned Aerial Vehicle	17
Khedidja Bouhaba, Mohamed Guiatni, Yasser Bouzid, and Mustapha Hamerlain	
Control of the Glucose Insulin Glucagon System in Type 1 Diabetes	27
Mahour Saoussane, Tadjine Mohamed, and Chakir Mesaoud	
Trajectory Tracking Control for a Differential Drive Mobile Robot	35
Nour el Islam Bouaziz, Khadir Lakhdar Besseghieur, and Nouara Achour	
Waypoint Navigation of a Mobile Robot Using IT2FLC with Wheel Slip Dynamic Modelling and Parameters Uncertainties	45
Y. Saidi, A. Messaoui, F. Demim, A. Nemra, and M. Tadjine	
Robust GPC Using Neural Networks for Phase-Shifting Transformers to Compensate Powers in a Transmission Line	57
Bouanane Abdelkrim, Nerziou Madani, Yahiaoui Merzoug, and Raouti Driss	
Robust Position and Attitude Tracking Control of Unmanned Quadrotor	67
Awatif Guendouzi	
Fuzzy Integral Sliding Mode Control of a Hyperdynamic Golf Swing Robot	77
Souhila Benmansour, Fethi Demim, and Ali Zakaria Messaoui	

Continuous Joint Movements and Torques Estimation Using an Optimized State-Space EMG Model	91
Ali Zakaria Messaoui, Mohamed Amine Alouane, Mohamed Guiatni, and Fazia Sbargoud	
Application of Synergetic Technique in Sensorless Induction Motor Drive Based MRAS Method	101
Samira Benaicha	
Passivity-Based Sliding Mode Controller Design for Quadrotor Using Ant Colony Optimization	109
Khedidja Bouhabza, Mohamed Guiatni, Yasser Bouzid, and Mustapha Hamerlain	
The Picard's Iteration Method for Finding Feedback Control of Linear Quadratic Optimal Control Problems	117
Abderrahmane Akkouche and Mohamed Aidene	
Terminal Synergetic Theory-Based Trajectory Tracking Control of Quadrotor with Rotating Arms Exposed to External Disturbances	125
Amina Belmouhoub, Yasser Bouzid, Slimane Medjmadj, Saddam Hocine Derrouaoui, and Mohamed Guiatni	
Sensorless Three-Level Direct Torque Control of a Five-Phase PMSM Using Sliding Mode Observer	135
N. Bounasla and S. Barkat	
Vision-Based Modeling and Control of Quadcopter for Uncooperative Ground Mobile Target Tracking	149
Hamza Bouzerzour, Ahmed Allam, and Mohamed Guiatni	
Linear Quadratic Regulator Control of Heating System in Office Building	163
Nassima Ouali, Hocine Lehouche, and Thiziri Makhlof	
Adaptive Control Design with Saturation Constraints for Different Experimental Glucose Models	171
Menani Karima and Abdelaziz Mourad	
Trajectory Planning Using Modified Artificial Potential Field Method	185
Nour el Islam Bouaziz, Khadir Lakhdar Besseghieur, and Nouara Achour	
Performances Analysis of Fractional System Using the Fractional Order Adaptive PID Controller	193
Y. Bensafia, A. Idir, and K. Khettab	

Tuning Hybrid Super Twisting Algorithm with Fuzzy Logic Type 2 Controller by PSO Applied in DTC of Dual Star Induction Machine	205
G. Boukhalfa, L. Laggoun, A. Khemis, B. Kiyyour, S. Belkacem, and Y. Beddai	
A New Approach of Sensorless Control of Induction Motor Using Type-2 Fuzzy Logic Observer	217
A. Khemis, T. Boutabba, M. Kaddache, L. Laggoun, and G. Boukhalfa	
Robust Induction Motor Control Using Polytopic Models	233
I. Benlaloui, K. Dalila, and T. Boutabba	
Adaptive Synergetic Control of a Multi-rotor with a Manipulation Arm	243
Zamoum Housseyn, Bouzid Yasser, and Guiatni Mohamed	
Second Order Sliding Mode Speed Observer for Field-Oriented Control of Induction Motor	251
Hadda Benderradj, Yahia Laamari, Idriss Benlaloui, Larbi Chrif Alaoui, and Makouf Abdessalem	
Comparison of Optimal PI and FOPI Controllers Tuned by PSO Algorithm for FO-TITO Process with Fractional Inverted Decoupling	261
Sami Laifa, Badreddine Boudjehem, Hamza Gasmi, and Djamil Boudjehem	
Backstepping Based Control of Quadrotor UAV	277
Segheri Mohamed, Boudjema Fares, Nemra Abdelkrim, and Bibi Youssouf	
Control of Blood Glucose Level in Diabetics: A Simulation and Comparison Study	293
Touitou Ikram and Ziani Salim	
Unicycle Mobile Robots Formation Tracking: Application to Dynamic Target Entrapping	301
Ahmed Allam, Ouissam Boudiba, Elhaouari Kobzili, Abdelkrim Nemra, and Mohamed Tadjine	
Dynamic Event-Triggered Estimation Control of Markovian Switching Systems Applied to DC-DC Converters	313
Abdelmalek Zahaf, Abdelhamid Bounemeur, Sofiane Bououden, Abdelaziz Abboudi, and Mohamed Chemachema	
Front Rear Car Recognition for Edge Devices	323
Salim Abdelaziz and Salim Ziani	

Fault Diagnosis-Fault Tolerant Control (FTC)

A Constrained PSO Based Model Predictive Control for Mobile Robot System with Sensor Faults	333
Abdelmalek Zahaf, Abdelaziz Abboudi, Abdelhamid Bounemeur, Sofiane Bououden, and Mohamed Chemachema	
Robust Active Fault Tolerant Tracking Control for Constrained NLPV System Subject to Sensor and Actuator Faults	343
Ines Righi, Sabrina Aouaouda, and Mohammed Chadli	
Application of Temporal Envelope Extracted by Square Root of the Three-Phase Currents for Dynamic Eccentricity Fault Diagnosis Within Inverter-Fed Induction Machine	357
Hamid Khelfi, Salim Hamouda, and Samir Hamdani	
State Estimation for Monitoring Using MLP Neural Networks Based on Adaptative Learning Algorithm Observer Applied to Modular Capacitor Four Level DC-DC Chopper	365
Meradi Samir, Said Barkat, Benmansour Khelifa, and Tadjine Mohamed	
Gas Turbine Fault Detection by Non-linear Principle Component Analysis	375
Fenghour Nadir, Bouakkaz Messaoud, and Hadjadj Elias	
Detection and Localization of Phase Insulation Fault in a Set Inverter-Induction Motor	391
Bilal Djamel Eddine Cherif, Sara Seninete, Hilal Rahali, and Mostefa Tabbakh	
Fault Diagnosis and Fault-Tolerant Control Applied to a PMSM Drive Under Open Switch Fault	403
Hicham Zaimen, Said Touati, and Ali Rezig	
Adaptive Fuzzy Fault-Tolerant Control with Non-affine Nonlinear Actuator Failures	413
Bounemeur Abdelhamid, Chemachema Mohamed, Zahaf Abdelmalek, Bouzina Salah, and Bououden Sofiane	
Open-Switches Fault Diagnosis and Fault Tolerant Direct Torque Control of Voltage Source Inverter Fed Induction Motor	429
Fouad Eddine Boubou, Abd Elouahed Nedjai, and Abdelkarim Ammar	
Fault-Tolerant Predictive Control with Sensor Faults	439
Bououden Sofiane, Abboudi Abdelaziz, Boulkaibet Ilyes, Fouad Allouani, and Mohammed Chadli	

Studying of Unbalanced Supply Voltage Effects on Three-Phase Induction Motor Performances Based on Line Neutral Voltage Analytical Calculation	455
Abderrahim Touil and Fatima Babaa	
Modeling of Two Five-Phase Induction Machines Connected in Series with a Phase Fault	469
Mohamed Nekkaz and Abdelkader Djahbar	
Outer Race Bearing Health Prognosis Using Feature Extraction and Continuous Wavelet Transform	481
Ilham Bouaissi, Ali Rezig, Said Touati, and Mohamed Lamine Chelaghema	
A New Approach of Fault Correction Based on Reconfiguration Topology of Tow Level PWM Inverter	493
Merabet Hichem, Bedoud Khouloud, Bahi Tahar, Boukadoum Aziz, Drici Djalel, and Oudjani Brahim	
Partical Swarm Optimization Based Adaptive Fault-Tolerant Control for Quadrotor Attitude Stabilization	501
Bounemeur Abdelhamid, Chemachema Mohamed, Zahaf Abdelmalek, Bouzina Salah, and Bououden Sofiane	
Unconventional Algorithms in Control Engineering (UACE)	
A Spider Monkey Optimization Based on Local Search-Based Heuristic Method for Unmanned Combat Aerial Vehicle (UCAV) Path Planning	525
Allouani Fouad, Xiao-Zhi Gao, Abdelaziz Abboudi, and Sofiane Bououden	
Unmanned Aerial Vehicle Localization Using an Advanced Technique Based on the Smooth Variable Structure Filter	539
Fethi Demim, Ahmed Allam, Abdenebi Rouigueb, Amar Benghezal, Abdelkrim Nemra, Abdelouahab Bazoula, Elhaouari Kobzili, and Mustapha Hamerlain	
Autonomous Underwater Vehicle Localization and Map Building Based SVSF Using Smoothing Boundary Layer Width	555
Fethi Demim, Hamza Bouzerzour, Abdenebi Rouigueb, Amar Benghezal, Ahmed Allam, Abdelkrim Nemra, Mohamed Gauiatni, Elhaouari Kobzili, and Abdelouahab Bazoula	
Synchronization in Secure Communication by Identification of Chaotic Piezoelectric Resonator	571
Maamri Fouzia, Bouras Mostefa, Djellab Hanane, Bououden Sofiane, Boumahrez Farouk, and Sahour A. Hakim	

Solution of Combined Economic and Emission Dispatch Problem Using a Lagrangian Dynamic Neural Networks	579
Smail Boudab, Ghania Debbache, and Noureddine Goléa	
Optimized DC-Bus Voltage Controller for PDPC of Shunt Active Power Filter Based Rooted Tree Optimization Algorithm	589
Youcef Bekakra, Slimane Touil, Laid Zellouma, and Om P. Malik	
Solution of Combined Economic Emission Dispatch Problem Using Sparrow Search Algorithm	601
Dahmani Kaouthar Lalia, Naama Bakhta, Abrouche Amel, Bouzeboudja Hamid, and Brahim Aboubkr	
Software Implementation for the ESP32-Based EEG Measurement System	609
Hafed-Eddine Bendib, Mebarek Bahri, Mohamed Boumehraz, Ali Mallem, and Walid Benaziza	
Solving Economic Dispatch Problem with and Without Solar Energy Using Chameleon Swarm Algorithm	619
Abrouche Amel, Bouzeboudja Hamid, Dahmani Kaouthar Lalia, and Naama Bakhta	

Detection and Localization of Phase Insulation Fault in a Set Inverter-Induction Motor



Bilal Djamel Eddine Cherif, Sara Seninete, Hilal Rahali,
and Mostefa Tabbakh

Abstract Stator current analysis for preventive maintenance is an essential tool for industries. Its use is intended to serve three levels of analysis: supervision, diagnosis and monitoring of the state of damage to equipment. The main objective of this paper is to propose a diagnosis and monitoring method based on the analysis of the stator current for the detection and localization of a short-circuit fault occurred on the inverter (insulation fault of a phase). The proposed method uses signal processing techniques (temporal and spectral domain) combined with a machine learning technique to locate the faulty phase. The study begins with the application of the fast Fourier transform (FFT) to detect the harmonic characterizing the short-circuit fault of a phase of the inverter, and then a statistical study based on the skewness calculation is performed at the stator current spectrum for each phase. The second part of the study applies the random forest RF to locate the faulty phase. The features used to train the RF model are the amplitude of the harmonic f_{150} and the value of the skewness. The results obtained by RF show a good performance with a very high classification rate equal to 98.98%.

Keywords Induction motor · Inverter · Fault · Insulation fault · FFT · Random forest

B. D. E. Cherif (✉) · H. Rahali · M. Tabbakh

Department of Electrical Engineering, Faculty of Technology, University of M'sila, 28000 M'sila, Algeria

e-mail: cherif.bilaldjamaeddine@univ-msila.dz

H. Rahali

e-mail: hilal.rahal@univ-msila.dz

M. Tabbakh

e-mail: mostefa.tabbakh@univ-msila.dz

S. Seninete

Department of Electrical Engineering, Faculty of Technology, University of Mostaganem, 27000 Mostaganem, Algeria

1 Introduction

Significant development has been carried out on the diagnosis of variable speed electric drives in the presence of induction motor faults such as the broken of one or more consecutive bars and/or portion of a short-circuit ring, the running short-circuit between turns in the windings and the different types of eccentricities. Or in the presence of static converter faults, such as the open-circuit fault or short-circuit fault of an IGBT, insulation fault of a phase and short-circuit fault of a DC stage [1].

Static converters, particularly inverters, are predominantly present in variable speed electric drive systems. Data concerning reliability, from the literature justify the scope envisaged for the implementation of fault or fault tolerance. The percentage distributions of faults in an inverter are: 60% DC stage short-circuit; 31% IGBT fault; 6% diode fault [2, 3].

In recent decades, the early detection and diagnosis of faults affecting inverter-induction motor assemblies has been the subject of much research. There are several types of detection and diagnosis techniques, namely vibration analysis, acoustic analysis and thermography. However, these methods are mainly recommended for the detection of mechanical faults [4].

A new technique is also used more and more in recent years. It is based on the analysis of the stator current. Its peculiarity lies in the fact that the stator current contains information on almost all the faults that may appear at the level of the inverter-induction motor assembly. The analysis of stator currents in the frequency domain remains the most commonly used method, especially for stationary regimes, because the resulting spectrum contains a source of information on the majority of electrical faults [5, 6].

For the detection of fault, several researchers have identified and developed various signal processing techniques allowing the detection and diagnosis of insulation phase fault of the inverter. Typical techniques include spectral analysis (Fast Fourier transform FFT) [7].

The famous fast Fourier transform (FFT) algorithm for calculating FFT is based on the recursive use of these formulas. When N is not a power of two, analogous calculation using a prime factorization leads to the same order of magnitude $c(N \log_2 N)$ of the number of multiplications and additions [8, 9].

For the automatic monitoring of complex devices, it is necessary to develop diagnostic systems that have a certain ability to adapt to new situations (learning), and allow reliable recognition of the operating mode in which the system evolved [10].

Random forest methods are based on the combination of elementary classifiers of decision tree types. Individually, these classifiers are not known to be particularly efficient, but they have interesting properties to exploit in an EOC: they are not known to be particularly unstable. The specificity of trees used in random forests is that their induction is disturbed by a random factor, in order to generate diversity as a whole. It is on the basis of these two elements using decision trees as elementary classifiers and involving randomness in their induction that formalism of random forests was introduced [11].

In the field of inverter diagnosis, most papers have been published for the detection and localization of open-circuit faults of an IGBT. We cite some paper. The authors in [12], suggested Park's vector method to detect and locate the open-circuit fault of an IGBT. This technic is based on the mean value of Park vector currents in the plan ($d-q$) and the determination of the phase angle. The authors in [13, 14], suggested the standardized method of direct current. This technic is based on direct components and the first component of the harmonic coefficients of alternative currents. To detect and localize the defective IGBT, the DC component is divided by the absolute value of the first harmonic and compared to a threshold (set at 0.45). This technic has a certain drawback when implemented in a closed loop control system. The same authors proposed second method the standardized direct current method. To increase process reliability and avoid false alarms, the standardized direct current process has been refined.

The rest of this paper is organized as follows: in Sect. 2, we will discuss the modeling of two-level voltage inverter. Section 3, introduces the control of the inverter based on PWM-Vector. In Sect. 4, we introduce the inverter phase short-circuit fault (phase insulation fault) and their impact of the fault on the behavior of the induction motor. Section 5 introduces the automatic surveillance technic: The first part is based on the FFT for fault detection and the second part is based on machine learning to locate the faulty phase. Finally, Sect. 6 closes this paper with a conclusion.

2 Inverter Modeling

Figure 1 shows a block diagram of a three-phase voltage inverter with two levels.

According to the simplified diagram of the three-phase inverter, there is a relationship between the phase-to-neutral voltages coming from the inverter in points A, B, and C.

Fig. 1 Two-level three-phase voltage inverter

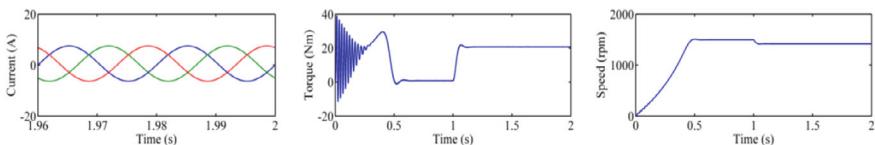
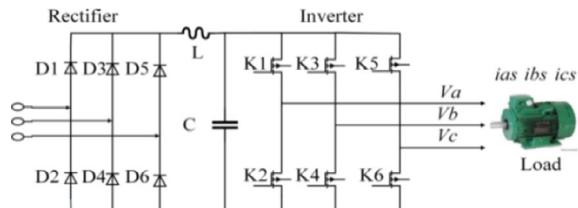


Fig. 2 Stator current, torque and speed in the case of healthy inverter

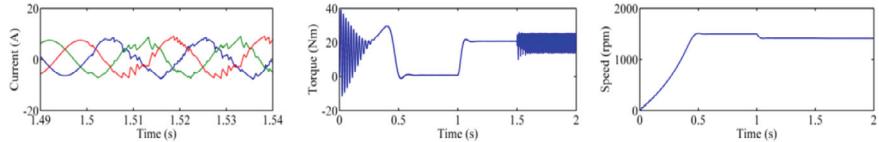


Fig. 3 Stator current, torque and speed in the case of inverter with one phase insulation fault

Fig. 4 Fast Fourier transform algorithm



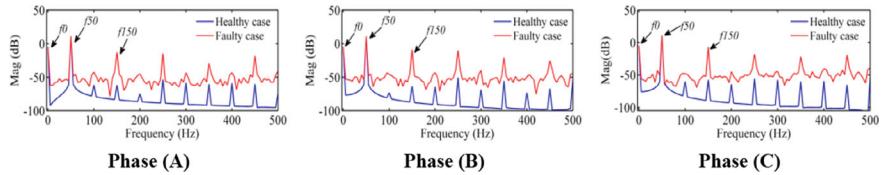


Fig. 5 Spectrum of the stator current of each phase for the healthy inverter and faulty inverter single phase insulation phase (A)

Fig. 6 Schematic diagram of a fault classifier based on random forest

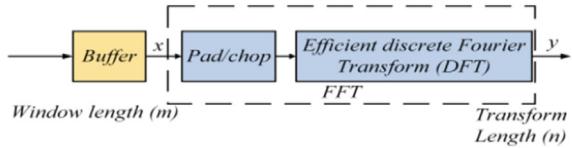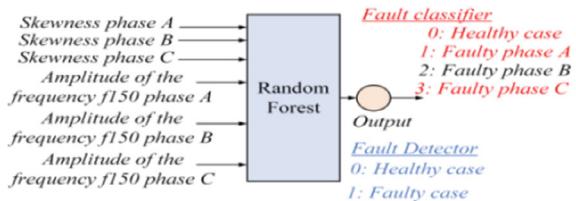

B and C and their values with respect to the midpoint (0), defined by the following matrix relation [15]:

$$\begin{bmatrix} V_A \\ V_B \\ V_C \end{bmatrix} = \frac{1}{3} \begin{bmatrix} 2 & -1 & -1 \\ -1 & 2 & -1 \\ -1 & -1 & 2 \end{bmatrix} \begin{bmatrix} V_{A0} \\ V_{B0} \\ V_{C0} \end{bmatrix} \quad (1)$$

The voltages V_A , V_B and V_C represent the voltages from the inverter to supply and control the induction motor. Knowing that [16]:

$$\begin{cases} V_{A0} = \frac{E}{2} S_a \\ V_{B0} = \frac{E}{2} S_b \\ V_{C0} = \frac{E}{2} S_c \end{cases} \quad (2)$$

The control signals S_i ($i = a, b$ and c) are given by:

$$\begin{aligned} S_i = 1 & \text{ } K_i \text{ is } \mathbf{ON} \text{ and } K'_i \text{ is } \mathbf{OFF} \\ S_i = 0 & \text{ } K_i \text{ is } \mathbf{OFF} \text{ and } K'_i \text{ is } \mathbf{ON} \end{aligned}$$

The voltages delivered by the inverter become:

$$\begin{bmatrix} V_{A0} \\ V_{B0} \\ V_{C0} \end{bmatrix} = \frac{E}{3} \begin{bmatrix} 2 & -1 & -1 \\ -1 & 2 & -1 \\ -1 & -1 & 2 \end{bmatrix} \begin{bmatrix} S_a \\ S_b \\ S_c \end{bmatrix} \quad (3)$$

The determination of the phase-to-phase voltages between two phases amounts to applying the following relation [17]:

$$\begin{cases} V_{AB} = V_A - V_B \\ V_{BC} = V_B - V_C \\ V_{CA} = V_C - V_A \end{cases} \quad (4)$$

The relation between the vector $[S_a, S_b \text{ and } S_c]^T$ and the vector of line voltages $[V_{ab}, V_{bc} \text{ and } V_{ca}]^T$ is given by:

$$\begin{bmatrix} V_{AB} \\ V_{BC} \\ V_{CA} \end{bmatrix} = E \begin{bmatrix} 1 & -1 & 0 \\ 0 & 1 & -1 \\ -1 & 0 & 1 \end{bmatrix} \begin{bmatrix} S_a \\ S_b \\ S_c \end{bmatrix} \quad (5)$$

2.1 Inverter Control

The strategy proposed in this article is vector PWM (pulse width modulation). This strategy consists of the six steps [18]:

Step 01: calculate the reference vector V_{ref} .

Step 02: calculate phase θ and sector i .

Step 03: translate to the first sector.

Step 04: Determine the triangle.

Step 05: Determine the vectors and calculate the switching times.

Step 06: Return to the initial sector.

Figure 2 shows the simulation results of the inverter- induction motor assembly with the triangular-sinusoidal technique.

We simulated the model of induction motor associated with a voltage inverter controlled by the vector PWM technique as above with no load, then a resistive torque of 20 Nm was applied at the instant $t = 1$ s. If we compare these results with the model without an inverter, we see that they are similar but they exhibit oscillations around an average value, these oscillations are mainly due to the presence of harmonics in the voltages delivered by the inverter.

2.2 Inverter with One Phase Insulation Fault

In the event of accidental grounding of a phase of the inverter, this phase is connected to the neutral of the induction motor thus establishing a short-circuit path through the inverter and the impedance of the differential mode filters and common mode. The disturbance of the induction motor control is not very important since the phase currents are regulated and a slight distortion is generated by the ripple of the direct voltage. On the other hand, large currents are taken from the network with a high distortion and a strong current circulates through the ground path [19].

By opening the contactors of the equipment, the fault is confined in the inverter- induction motor assembly and the loss of controllability of the inverter leads, in the absence of reconfiguration of the control, to a degraded regime with high currents and significant torque ripples. It is then possible to proceed with the blocking of the inverter to quickly suppress the current flow. If, however, the fault occurs in the over speed range, blocking the inverter no longer prevents the flow of current and the insulation envisaged is then beneficial to reduce the duration of the fault regime [19].

Figure 3 shows the simulation results of the induction motor supplied by a voltage inverter under a phase insulation fault.

The simulation results are presented in Fig. 3, the latter represent the curves: stator current, speed of rotation and electromagnetic torque. In the abnormal regime, these results in current amplitudes of the order of the rated current and a strong ripple torque. Only the motor sizing limits the short-circuit current, which however does not flow through the inverter. As this degraded speed is self-sustaining, it results in a loss of actuator controllability.

3 Detection and Location of a Phase Insulation Fault

3.1 Detection of a Phase Insulation Fault Based on FFT

When diagnosing phase insulation fault, FFT will be applied to estimate the fundamental frequency. And the other frequency components corresponding to the fault must be calculated. The phase insulation is one of the common faults in the inverter. The characteristic frequency component of the induction motor stator current with phase insulated in the inverter depends on the location of sideband frequency around the supply frequency (50 Hz). FFT response in the steady state region is used as a tool to detect the phase insulation fault. The normal operation of the motor should have peaked at FFT response located at 50 Hz without any sidebands, and if any fault happened, the sideband will appear.

Figure 4 shows the fast Fourier transform algorithm.

Using Matlab instruction, to implement FFT for vectors of length N as in following equations [20]:

$$y = fft(x) \quad (6)$$

where:

$$x(k) = \sum_{j=1}^N x(j) \omega_N^{(j-1)(k-1)} \quad (7)$$

$$x(j) = \left(\frac{1}{N} \right) \sum_{k=1}^N x(k) \omega_N^{-(j-1)(k-1)} \quad (8)$$

$$\omega_N = e^{(-2\pi i)/N} \quad (9)$$

Figure 5 shows the spectrum of the stator current of each phase for the healthy case and the case of a single phase insulation fault phase (A).

A comparative study between the spectrum of the healthy case and the spectrum of the faulty case under phase insulation clearly shows a particular frequency signature around 150 Hz. It should be noted that the frequency $f_{150} = 3 fs = 150$ Hz is the frequency which characterizes the phase insulation fault.

Table 1 summarizes the amplitudes of the harmonics (f_0 , f_{50} and f_{150}).

- **Skewness**

The skewness coefficient corresponds to a measure of the skewness of the distribution of a random variable [21]:

$$skewness = \frac{\sum_{i=1}^N [x(i) - \bar{x}]^3}{(N - 1)\sigma^3} \quad (10)$$

Table 1 Amplitude of the Harmonics (f_0 , f_{50} and f_{150})

Case	Phase (A)			Phase (B)			Phase (C)		
	f_0	f_{50}	f_{150}	f_0	f_{50}	f_{150}	f_0	f_{50}	f_{150}
Healthy case	− 4.7	10.7	− 61.9	− 4.7	10.7	− 63.4	− 4.7	10.7	− 57.5
Faulty phase (A)	− 4.7	11.06	− 12.9	− 4.7	10.31	− 9.02	− 4.7	11.3	− 7.13
Faulty phase (B)	− 4.8	11.17	− 9.4	− 4.7	11.33	− 13.02	− 4.7	10.3	− 18.8
Faulty phase (C)	− 4.7	10.19	− 11.8	− 4.7	11.05	− 10.1	− 4.7	11.3	− 13.5

Table 2 Skewness Values

Case	Phase (A)	Phase (B)	Phase (C)
Healthy case	0.00051234	0.000059511	0.00046402
Faulty phase (A)	0.0035	0.0020	− 0.0027
Faulty phase (B)	− 0.0169	0.0090	0.0010
Faulty phase (C)	0.0021	0.00020	0.0045

Table 2 summarizes the values of the skewness coefficient.

Once the Skewness value reaches its maximum, the correspondent phase contains then the fault.

3.2 *Localization of a Phase Insulation Fault Based on Random Forest (RF)*

This classification algorithm is given by the following steps.

Step 01: Select the random data points K from the training set.

Step 02: Build the decision trees associated with the selected data points (subset).

Step 03: Choose the N number for the decision trees that you want to create.

Step 04: Repeat steps 01 and 02.

Step 05: For new data points, search predictions of each decision tree and assign the new data points to the class that wins the majority votes.

Figure 6 shows the features used to form the random forest models and Fig. 7 shows the accuracy as a function of the trees number.

The accuracy achieves its maximum value when the Trees number equal to 39.

Fig. 7 Accuracy as function of the trees number

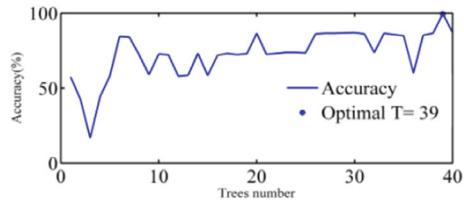


Fig. 8 Waveforms of output values from the machine learning technique based on random forest

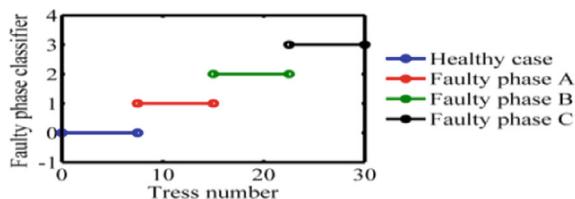


Figure 8 shows the waveform of the output of the random forest-based defect classifier.

The values obtained indicate that the classifier model selected by random forest has had considerable success in detecting and classifying phase insulation faults. After several simulation tests, the classification results obtained clearly demonstrate and confirm the effectiveness of the proposed diagnostic method with high recognition accuracy of 98.979%.

3.3 Evaluation Criteria

The data classification performance is evaluated by the calculation of [22]:

- **Accuracy**

The percentage of correctly classified examples is calculated according to:

$$Acc = \frac{T_P + T_N}{T_P + T_N + F_P + F_N} \quad (11)$$

- **Sensitivity**

Is the ability to get a positive result when the defect is present. It is calculated according to as:

$$Sens = \frac{T_P}{T_P + F_N} \quad (12)$$

Table 3 Evaluation criteria of random forest

Technique	Accuracy	Sensitivity	Specificity	Recall	g-mean
Randon Forest	0.9898	0.9795	0.9914	0.9798	0.9795

- **Specificity**

Is the ability to get a negative result when the defect is not present. It is calculated according to as:

$$Spec = \frac{T_N}{T_N + F_P} \quad (13)$$

- **Recall**

Is the ability to obtain a positive result when the defect is present. It is calculated according to as:

$$Rec = \frac{T_P}{T_P + F_N} \quad (14)$$

- **G-mean**

It is the geometric mean of sensitivity and precision given as:

$$GSP = \sqrt{sens \times prec} \quad (15)$$

Table 3 summarizes the Evaluation criteria of the random forest method.

4 Conclusion

The automatic monitoring of an inverter phase short-circuit fault (single phase insulation) is particularly illustrated in this paper. The stator current signals analyzed are provided from the simulation work. The proposed method consists of using a signal processing based on the fast Fourier transform, as well as a machine learning technic based on Random Forest. In this context the FFT is used to detect the frequency which characterizes the short-circuit fault of a phase of the inverter ($f_{150} = 150\text{Hz}$) and also to calculate the skewness coefficient to measure the asymmetry and the distribution of a random forest variable. These characteristics obviously enrich the random forest which offers a good classification revealing excellent performances by giving the fault phase. The proposed RF structure has the advantage of being simple in modeling and in implementation. The results obtained proved the efficiency of the method, giving an accuracy of 98.98%.

References

1. Ibrahim C, Djalal K, Salim C (2019) Continuous wavelet technique for detection of broken bar faults in induction machine. *Traitement du Signal* 36(2):171–176
2. Bilal Djamel Eddine C, Azeddine B, Mostefa T (2019) Diagnosis of an inverter IGBT open-circuit fault by Hilbert-Huang transform application. *Traitement du Signal* 36(2):127–132
3. Bilal Djamel Eddine C, Azeddine B, Mohamed Amine K (2016) Detection of open-circuit fault in a three-phase voltage inverter fed induction motor. *Int Rev Autom Control* 9(6):374–382
4. Rabah KA, Azeddine B et al (2018) Rolling bearing fault diagnosis based on an improved denoising method using the complete ensemble empirical mode decomposition and the optimized thresholding operation. *IEEE Sens J* 18(17):7166–7172
5. Wissam D, Mohamed B, Frédéric K et al (2019) Diagnosis and comparison between stator current analysis and vibration analysis of static eccentricity faults in the induction motor. In: 2019 4th international conference on power electronics and their applications (ICPEA). IEEE, pp 1–4
6. Ridha K, Arezki M, Hakima C (2019) Broken rotor bars fault detection in induction motors using FFT: simulation and experimentally study, Algerian. *J Eng Technol* 1:19–24
7. Ridha K, Arezki M, Hicham T (2013) Approach signal for rotor fault detection in induction motors. *J Fail Anal Preven* 13(3):346–352
8. Bilal Djamel Eddine C, Azeddine B, Sara S (2019) A comparative study between two stator current HHT and FFT techniques for IM broken bar fault diagnosis. In: 2019 6th international conference on image and signal processing and their applications (ISPA). IEEE, pp 1–6
9. Supachai P, Satean T, Santi W (2021) Testing and analysis fault of induction motor for case study misalignment installation using current signal with energy coefficient. *World Electric Veh J* 12(1):37
10. Zahra H, Uswa J, Saima S et al (2021) Diagnostic accuracy of machine learning models to identify congenital heart disease: a meta-analysis. *Front Artif Intell* 4:97
11. Md Zahangir A, Saifur RM, Sohel RM (2019) A Random Forest based predictor for medical data classification using feature ranking. *Inform Med Unlocked* 15:100180
12. Bilal Djamel Eddine C, Azeddine B, Amine K et al (2017) The enhancement of park current vectors technique for inverter fault detection. In: 2017 6th international conference on systems and control (ICSC). IEEE, pp 377–382
13. Teresa OK, Piotr S (2013) Simple sensorless diagnosis method for open-switch faults in SVM-VSI-fed induction motor drive. In: IECON 2013–39th annual conference of the IEEE industrial electronics society, pp 8210–8215. IEEE
14. Won-Sang IM, Jang-Sik KIM, Jang-Mok KIM et al (2012) Diagnosis methods for IGBT open switch fault applied to 3-phase AC/DC PWM converter. *J Power Electron* 12(1):120–127
15. Lei HU, Hongyan W, Van D et al (2004) A simple SVPWM algorithm for multilevel inverters. In: 2004 IEEE 35th annual power electronics specialists conference (IEEE Cat. No. 04CH37551). IEEE, pp 3476–3480
16. Omessaad E, Zina B, Mouna Ben H (2017) Inverter control: comparative study between SVM and PWM. In: 2017 international conference on green energy conversion systems (GECS). IEEE, pp 1–6
17. Pramanick S, Boby M, Azees NA, Gopakumar K, Williamson SS (2016) A three-level dodecagonal space vector-based harmonic suppression scheme for open-end winding IM drives with single-de supply. *IEEE Trans Indus Electron* 63(11):7226–7233
18. Chamarthi P, Chhetri P, Agarwal V (2016) Simplified implementation scheme for space vector pulse width modulation of n-level inverter with online computation of optimal switching pulse durations. *IEEE Trans Indus Electron* 63(11):6695–6704
19. Bilal Djamel Eddine C, Azeddine B, Mokhtar B et al (2017) Review on external and internal faults of an association inverter-motor and their impact on the motor operation. In: 2017 international conference on green energy conversion systems (GECS). IEEE, pp 1–7
20. Khalaf Salloum G, Hew Wooi P, Mustafa K et al (2011) Fault diagnosis of induction motor using MCSA and FFT. *Electr Electron Eng* 1(2):85–92

21. Debopoma Kar R, Tamal R, Surajit C (2020) Skewness scanning for diagnosis of a small inter-turn fault in quadcopter's motor based on motor current signature analysis. *IEEE Sens J* 21(5):6952–6961
22. Mohamed E, Mazin Abed M, Salama MA et al (2021) A new multi-agent feature wrapper machine learning approach for heart disease diagnosis. *Comput Mater Contin* 67:51–71